

拨动开关

型号	SS-12D10
长度	参考下页尺寸图
宽度	参考下页尺寸图
高度	参考下页尺寸图
材质	红铜


商品实图：

(待补充)


注：此图来自互联网，型号兼容，仅供参考



SCHEMATIC (NON-SHORTING)






P.C.B LAYOUT

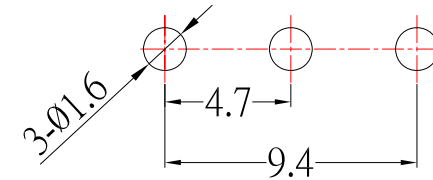

Model No.	X(mm)
SS-12D10-G2	2mm
SS-12D10-G3	3mm
SS-12D10-G4	4mm
SS-12D10-G5	5mm
SS-12D10-G6	6mm
SS-12D10-G7	7mm
SS-12D10-G8	8mm
SS-12D10-G9	9mm

SPECIFICATIONS

- 1.RATING: 125V 2A ;
- 2.CIRCUIT: 1C-2P ;
- 3.TIMING: NON SHORTING ;
- 4.TRAVEL: 2 mm;
- 5.OPERATING FORCE: 300 ± 100gf ;
- 6.CONTACT RESISTANCE: 70 mΩ ;
- 7.LIFE:10,000 CYCLES.

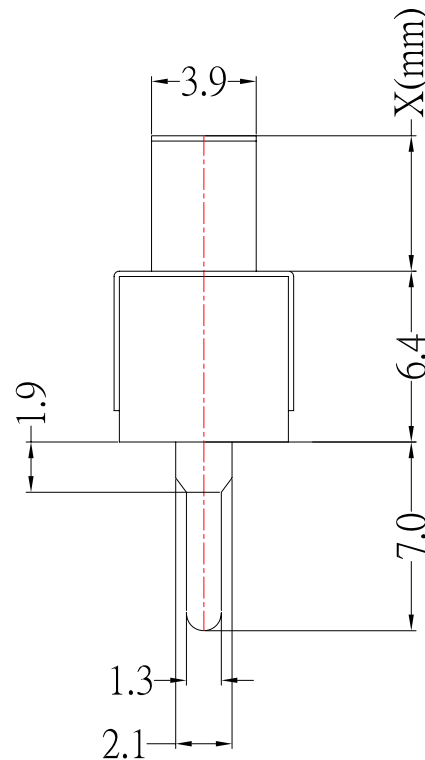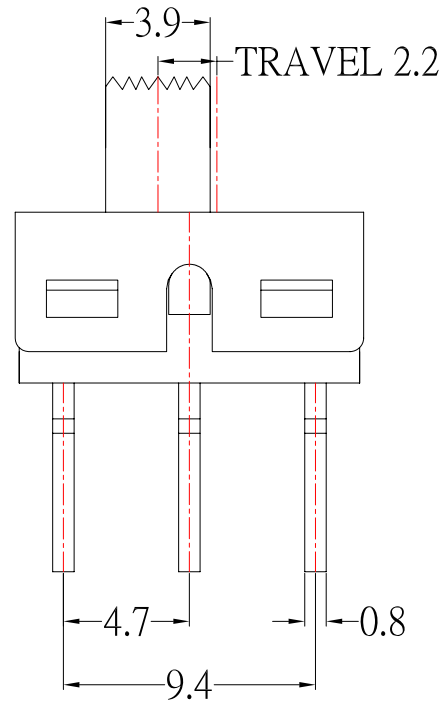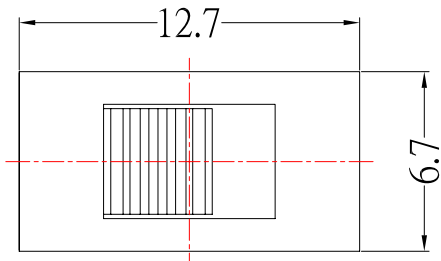

				DRAWN BY: Frank Wu		DATE: 04/16/12	MAT'L		TITLE: SWITCH	
				CHECKED BY: Jacky Chen		DATE: 04/16/12	FINISH		MODLE: SLIDE SWITCH	
				APPROVED BY: Tony Kao		DATE: 04/16/12	SCALE: 1 : 1	DWG NO.	SS-12D10-Gx	SIZE: A4
1	更新圖紙	FrankWu	041612	TOLERANCE UNLESS OTHERWISE STATED	Up to 5 ±0.2 Above 5 ~ 30 ±0.3 Above 30 ~ 50 ±0.4 Above 50 ±0.5 Angle ±0.3°	3RD. ANGEL'S	UNITS	MM	PART NO.	SS-12D10-Gx
ITEM NO.	DESCRIPTION	DRAWN	DATE						SHEET NO.	1 of 1