


Specifications:

Current rating: 3A AC/DC  
 Voltage Rating: 250V AC/DC  
 Contact Resistance: 20m ohm Max  
 Insulation Resistance: 1000M ohm Min  
 Withstanding Voltage: 600V AC For one Minute  
 Operating Temperature Range: -40°C To +105°C




Materials:

Insulator: PBT (UL94V-0)  
 Insulator Color: Black  
 Contact: Copper Alloy  
 Plating: Gold/Tin/Selective Gold Plated

How To Order

2211S-XXX

- G: Gold Plated
- T: Tin Plated
- SG: Selective Gold Plated
- No. of Contacts
- Straight Type

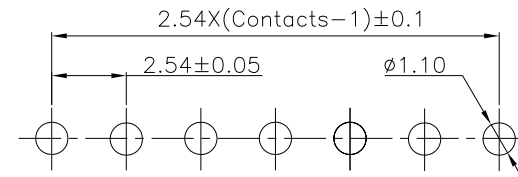

PCB Layout

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:	<b>Neltron Industrial Co., Ltd.</b>	DESCRIPTION: 2.54mm Pin Header Single Row Straight Type	SIZE <b>A4</b>
E			Cel King	.X=±0.20 .XX=±0.15				
D			CHECKED:	UNIT: MM	DESCRIPTION:			
C			Jeremy Liu	SCALE: 1:1	2.54mm Pin Header Single Row Straight Type			
B			APPROVAL:	SHEET:	PART NO:	2211S-XXX		
A	25-Oct-2005		Cel King	Mike Wu	PROJECTION:			
REV	DATE	FILE	BY					