
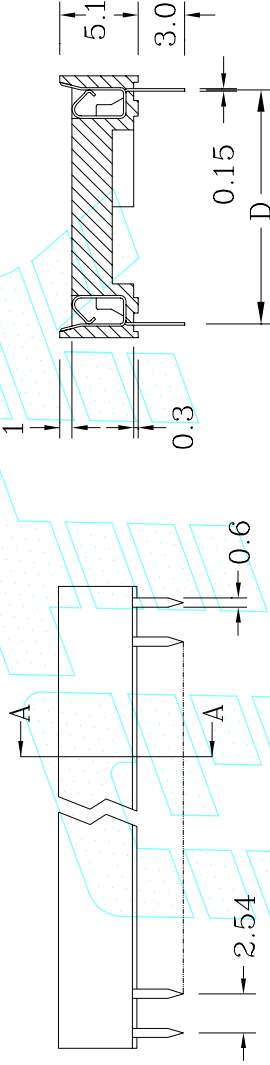


IC SOCKET PITCH:2.54mm

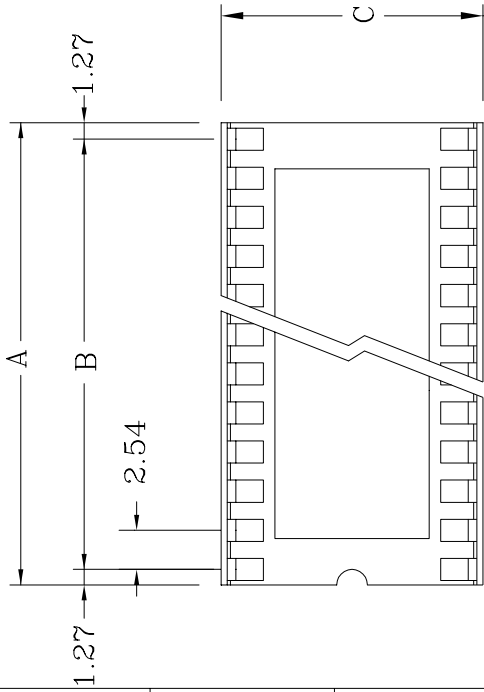

Section A-A

Contact Resistance: 30mΩ max. at DC 100mA  
 Insulator Resistance: 1000MΩ min. at DC 500V  
 Current Rating: 1 AMP  
 Dielectric Withstanding Voltage: AC 500V For 1 minute  
 Operating Temperature: -55° C ~ +105° C  
 Contact: BRASS  
 Housing: PBT & 30% Glass Fiber (UL 94V-0)

PART_NO	Dimension			
	A±0.12	B±0.12	C±0.1	D±0.05
ISS06T1/03	7.62	4.98	10.16	7.62
ISS08T1/03	10.16	7.62	10.16	7.62
ISS14T1/03	17.78	15.24	10.16	7.62
ISS16T1/03	20.32	17.78	10.16	7.62
ISS18T1/03	22.86	20.32	10.16	7.62
ISS20T1/03	25.40	22.86	10.16	7.62
ISS22T1/03	27.94	25.40	10.16	7.62
ISS24T1/03	30.48	27.94	10.16	7.62
ISS28T1/03	35.56	33.02	10.16	7.62
ISS24T1/06	30.48	27.94	17.78	15.24
ISS28T1/06	35.56	33.02	17.78	15.24
ISS32T1/06	40.64	38.10	17.78	15.24
ISS40T1/06	50.80	48.26	17.78	15.24
ISS42T1/06	53.34	50.80	17.78	15.24
ISS48T1/06	60.90	58.36	17.78	15.24
ISS64T1/09	81.15	78.37	26.00	22.86

REV	ECN NO.	DESCRIPTION	DATE
A	GTKSD0496	RELEASE	DEC.24.01

TOLERANCE UNLESS OTHERWISE SPECIFIED		PROJECTION
LINEAR	ANGLE	
X. ±	X° ±	
.X ±	.X° ±	
.XX ±	.XX° ±	
.XXX ±	.XXX° ±	
APPD		
CHKD		
DRAW	Tao.Tao.	DEC.24'2001

UNITS	TITLE
SCALE	IC SOCKET
SIZE	DIP SOLDER TYPE
A4	CPART NO



GOLD-TEK ELECTRIC CO., LTD.

PART NO.	CAD NO.	SHEET
ISS**T1/03(06)(09)	F:\Draw\PH\PH-0113	1 OF 1

圖面編號:GTKSD0496-A(1)