


| Date | SYM | REVISION RECORD | AUTH | DR. | CK. |
|----------|-----|-----------------------------|------|------|-----|
| 10/26/12 | E | Dim. Ø1.60 was Ø1.19 | T.B. | B.S. | |
| 10/03/14 | F | UPDATED TO ROHS 2 COMPLIANT | T.B. | B.S. | |
| 06/30/17 | G | DIM. 72.90 WAS 72.50 | T.B. | B.S. | |
| 07/22/17 | H | ADDED MOUNTING INSTRUCTION | T.B. | B.S. | |

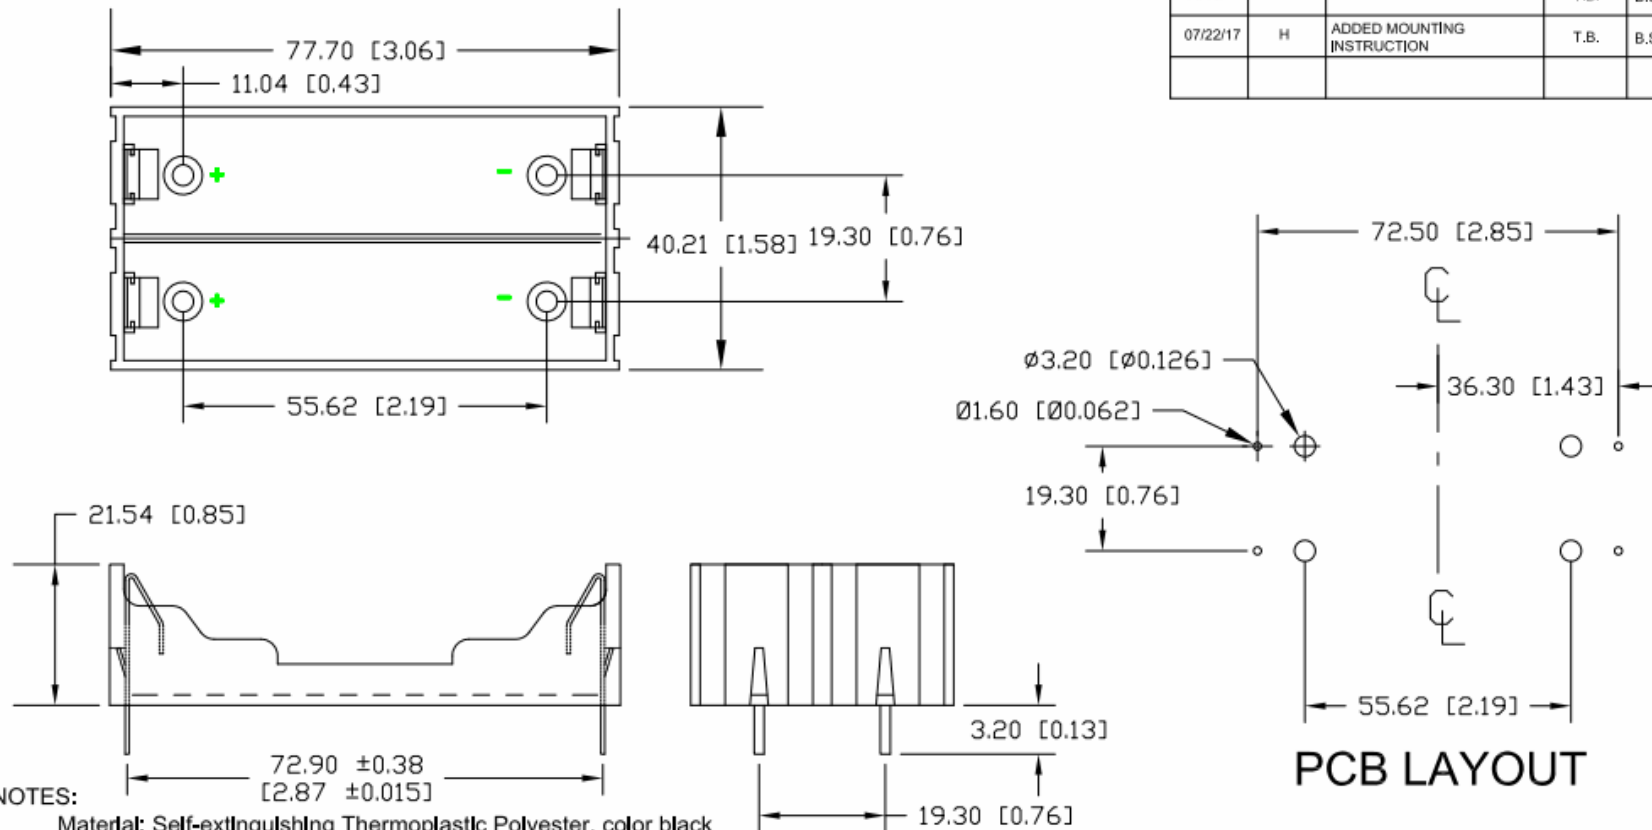


NOTES:

Material: Self-extinguishing Thermoplastic Polyester, color black
 Temperature Range: -40°C to +180°C
 Contacts: 302 Stainless Steel Spring Temper, Nickel Plated
 Flammability Rating: UL 94V-0
 Dielectric Strength: 560 Volts/Mil. at 25°C for 5 Sec.
 Resistance to Solvents: Xylene, ethyl, butyl, methyl & toluene
 Weight: 19.55g.
 ROHS 2 COMPLIANT

Mounting Instruction:

Use 2-56 machine screws or eyelets 0.089" OD by 0.15" flange stimpson GS-3 series or equivalent. also adhesives and double sided tapes work well.

| | | | |
|--------------------------|---|--------------------------------|---------------|
| Tolerance (Inches) |  Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735 | | |
| Decimal ±.5 (.020) | | Scale | Drawn By B.S. |
| Fractional ±.8 (.030) | Title TWD 18650 LI-ION CELL HOLDER | | |
| Angular ± 3° | Date 07/22/17 | Drawing Number BK-18650-PC4 | |
| | | Approved By T.B. | |