| REV. | ECN NO. | DESCRIPTION | DATE |
|---|---|---|---|
| A | I627:H301-11 | RELEASE | JAN.07.02 |
| | | | |
| | | | |







RECOMMEND P.C.B. LAYOUT
BOTTOM VIEW

| Number Of Position | DIMENSIONS | | |
|---|---|---|---|
| | A | B | C |
| 10 | 32.00 | 21.84 | 10.16 |
| 14 | 37.08 | 26.92 | 15.24 |
| 16 | 39.62 | 29.46 | 17.78 |
| 20 | 44.70 | 34.54 | 22.86 |
| 24 | 49.78 | 39.62 | 27.94 |
| 26 | 52.32 | 42.16 | 30.48 |
| 30 | 57.40 | 47.24 | 35.56 |
| 34 | 62.48 | 52.32 | 40.64 |
| 40 | 70.10 | 59.94 | 48.26 |
| 50 | 82.80 | 72.64 | 60.96 |
| 60 | 95.50 | 85.34 | 73.66 |
| 64 | 100.58 | 90.42 | 78.74 |




MATERIALS
HOUSING: NYLON 6T (UL 94V-0), BLACK.
TERMINAL: S.Q. 0.50mm BRASS, GOLD PLATING.

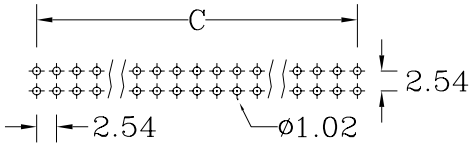SPECIFICATION
CURRENT RATING: 1 AMP. MAX.
DIELECTRIC WITHSTANDING VOLTAGE: 800V AC R.M.S.
FOR ONE MINUTE.
INSULATION RESISTANCE: 5000M OHMS MIN.AT 500V DC.
OPERATING TEMPERATURE: -55°C TO +105°C.




standard latch
PART_NO:
SCP**GS11

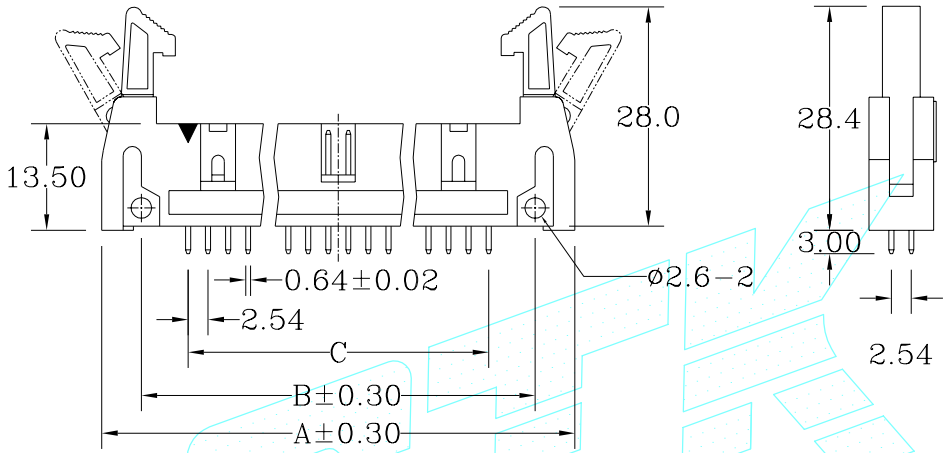


short latch
PART_NO:
SCP**GS11/S




short short latch
PART_NO:
SCP**GS11/SS

| TOLERANCE UNLESS OTHERWISE SPECIFED | | | PROJECTION |
|---|---|---|---|
| LINEAR | | ANGLE | |
| X. ± | | X°. ± 3° | UNITS |
| .X ± 0.3 | | .X° ± | MM |
| .XX ± 0.2 | | .XX° ± | |
| .XXX± | | .XXX°± | SCALE |
| APPD | | | |
| CHKD | | | SIZE |
| DRAW | Tao.Tao. | JAN.07.2002 | A4 |

GOLD-TEK ELECTRIC CO., LTD.

TITLE
P.C BOARD HEADER
CONNECTOR WITH LATCH
180° PITCH:2.54
ROW TO ROW:2.54

CPART NO

PART NO.
SCP**GS11 (/S)(/SS)

CAD NO. I627
F:\Drw\PH\PH-0135

SHEET
1 OF 1

圖面編號:GTKSD0889-A(1)