


RoHS COMPLIANT

REV	ECN NO.	DESCRIPTION	DATE
A		RELEASE	DEC.17.01
B		MODIFY P/N	SEP.28.05
C		ADD. RoHS	DEC.17'07
D		MODIFY P/N	DEC.09'10

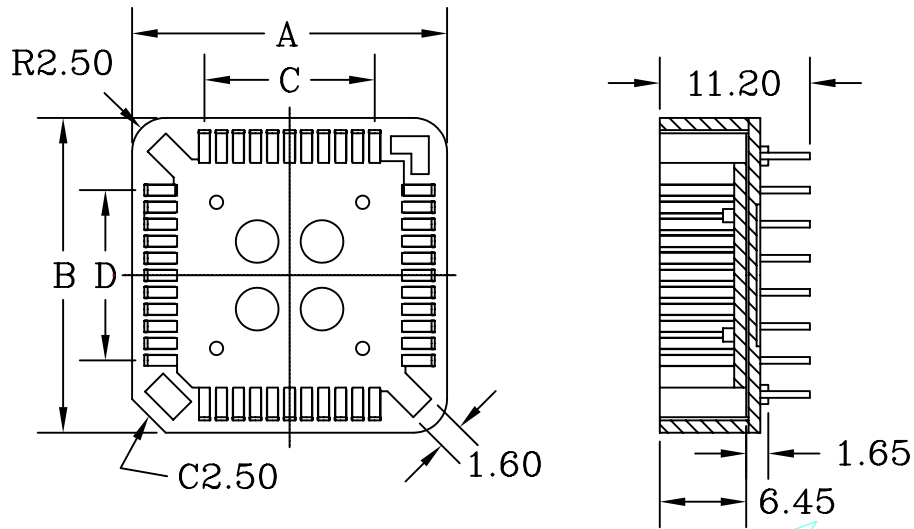


MATERIAL:
 INSULATOR :Hi-temp PBT or PPS.UL 94V-0
 standard color:black
 other color option:BR=brown
 Contact material:phosphor bronze JIS 5210
 Contact Plated :120u"tin over 30u"nickel

SPECIFICATIONS:
 Temperature range:-50°C to 105°C
 CURRENT Rating :1 AMP
 Capacitance:1.0 Picoforads (Max)
 Contact resistance:30 Milliohms (Max)
 Insulation Resistance :1000 Megohmx (Max)
 Withstanding Voltage: AC 600 Vrms

MIDDLE TYPE:

NO OF CONTACT		A±0.15	B±0.15	C±0.1	D±0.1	E±0.1	F±0.1
20	PPS PBT	15.50	15.50	5.08	5.08	5.08	5.08
28	PPS PBT	18.04	18.04	7.62	7.62	7.62	7.62
32	PPS PBT	18.04	20.60	7.62	10.16	7.62	10.16
44	PPS PBT	23.48	23.48	12.70	12.70	12.70	12.70
52	PPS PBT	25.88	25.88	15.24	15.24	15.24	15.24
68	PPS PBT	31.04	31.04	20.32	20.32	20.32	20.32
84	PPS PBT	36.04	36.04	25.40	25.40	25.40	25.40
68	PBT	31.66	31.66	20.32	20.32	20.32	20.32
84	PBT	36.66	36.66	25.40	25.40	25.40	25.40

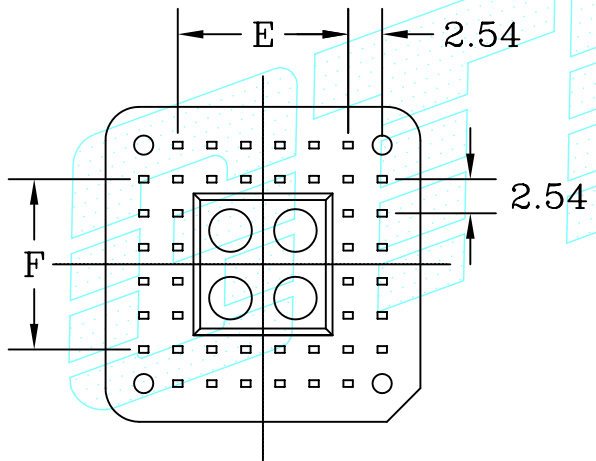

TOLERANCE UNLESS OTHERWISE SPECIFIED		PROJECTION	GOLD-TEK ELECTRIC CO., LTD.	
LINEAR	ANGLE	 UNITS MM SCALE SIZE A4	TITLE	PART NO.
X ± 0.25	X° ± 2		PLCC SOCKET	PLCC**TD(-BR)-TUBE
.XX ± 0.15	.XX° ±		DIP TYPE	CAD NO. I315
.XXX±	.XXX°±		CPART NO	SHEET
APPD			F:\Drw\SOC\SOC-0135	1 OF 1
CHKD			圖面編號:GTKSD0251-D(1)	
DRAW	Z. DEC.09'2010			