
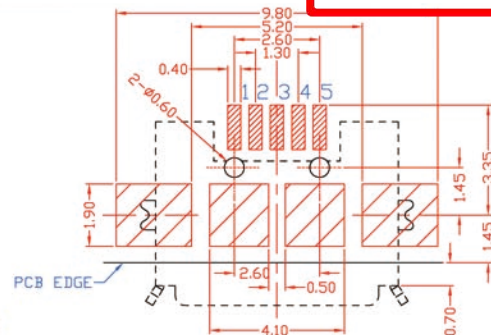


NO.	NAME	MATERIAL	FINISH	Q'TY	REMARK
1	HOUSING	LCP+GF30%	BLACK	1	
2	PIN TERM.	PHOSPHORATED 18-25um	GOLD PLATED	5	Contact: Gold 30μ Other Areas: Gold 1μ
3	SHELL	STAINLESS T-025	TIN PLATED/MATTE Sn	1	TIN 120-200μ

參考圖
REFERENCE

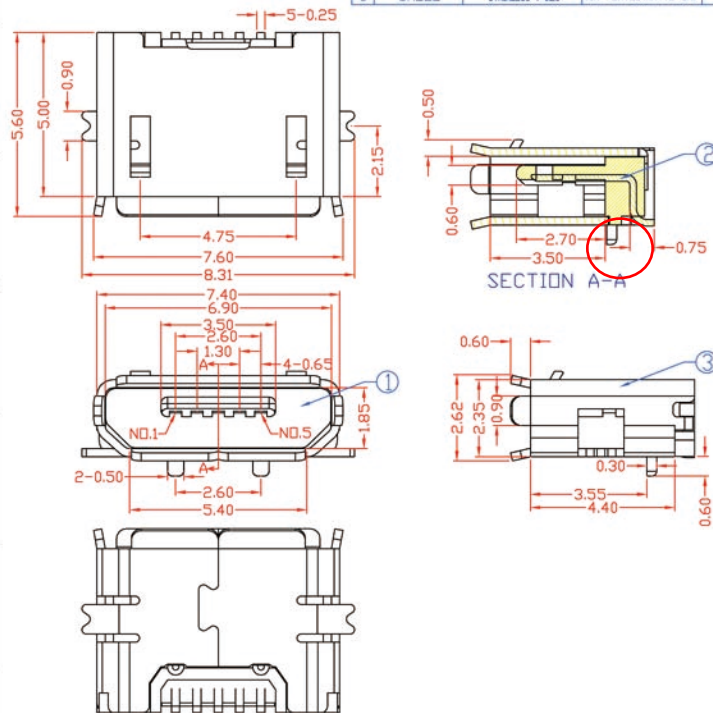

Specification:

*Contact Resistance:

(1)30m Ohm Max. at 100mA

(2)10,000 Cycles After: 40m Ohm Max.at 100mA

*Rated Voltage: AC 30V

*Contact Current Rating:

(1)Signal Line: 1A/Pin (No. 1 to 5)

(2)2-Line For Power: 1.8A/Pin(No. 1 and 5),0.5A/Pin(No. 2 to 4)

*Insulation Resistance: 100M Ohm Min. At 500V DC

*Dielectric Withstanding Voltage: 100V AC for 1 Minute

*Durability (Life Test): 10,000 Cycles Front

*Insertion Force: 35 Newton Maximum

*Extraction Force: 8 Newton Minimum.

*Operating Temperature: -30 °C± +80 °C

*Solderability: 255 °C±5 °C;5 Sec

PART NO.

MRUMRB05FTKY-30U

MODEL

PAGE 1 OF 1

COMPUTER NO.

UNIT

SCALE

PART NAME

mm

1:1

MICRO USB B RECEPTACLE

APPD.

CKD.

DWG.

DATE

TOLERANCE

PART NO.

REV.

X. ±0.38
X ±0.25
XX ±0.13
XXX ±0.05

A0