

AUDIO FREQUENCY POWER AMPLIFIER
LOW SPEED SWITCHING


FEATURES

- Complementary to KTB772.

MAXIMUM RATINGS (Ta=25°C)

CHARACTERISTIC		SYMBOL	RATING	UNIT
Collector-Base Voltage		V_{CBO}	40	V
Collector-Emitter Voltage		V_{CEO}	30	V
Emitter-Base Voltage		V_{EBO}	5	V
Collector Current	DC	I_C	3	A
	Pulse (Note)	I_{CP}	7	
Base Current (DC)		I_B	0.6	A
Collector Power Dissipation	Ta=25°C	P_C	1.5	W
	Tc=25°C		10	
Junction Temperature		T_j	150	°C
Storage Temperature Range		T_{stg}	-55~150	°C







Note : Pulse Width $\leq 10\text{mS}$, Duty Cycle $\leq 50\%$.

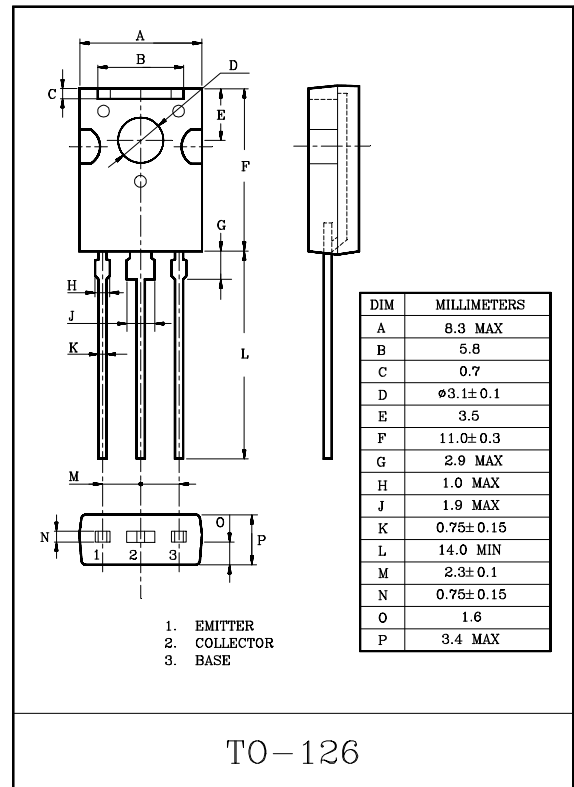

ELECTRICAL CHARACTERISTICS (Ta=25°C)


CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current	I_{CBO}	$V_{CB}=30V, I_E=0$	-	-	1	μA
Emitter-Cut-off Current	I_{EBO}	$V_{EB}=3V, I_C=0$	-	-	1	μA
DC Current Gain *	$h_{FE(1)}$	$V_{CE}=2V, I_C=20\text{mA}$	30	150	-	
	$h_{FE(2)}$ (Note)	$V_{CE}=2V, I_C=1A$	100	160	400	
Collector-Emitter Saturation Voltage *	$V_{CE(sat)}$	$I_C=2A, I_B=0.2A$	-	0.3	0.5	V
Base-Emitter Saturation Voltage *	$V_{BE(sat)}$	$I_C=2V, I_B=0.2A$	-	1.0	2.0	V
Current Gain Bandwidth Product	f_T	$V_{CE}=5V, I_C=0.1A$	-	90	-	MHz
Collector Output Capacitance	C_{ob}	$V_{CB}=10V, I_E=0, f=1\text{MHz}$	-	45	-	pF

* Pulse Test : Pulse Width $\leq 350\mu S$, Duty Cycle $\leq 2\%$ Pulsed
 Note: $h_{FE(2)}$ Classification O:100~200, Y:160~320, GR:200~400

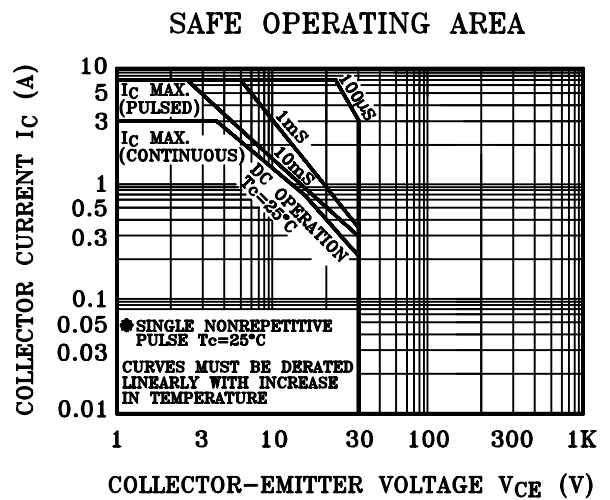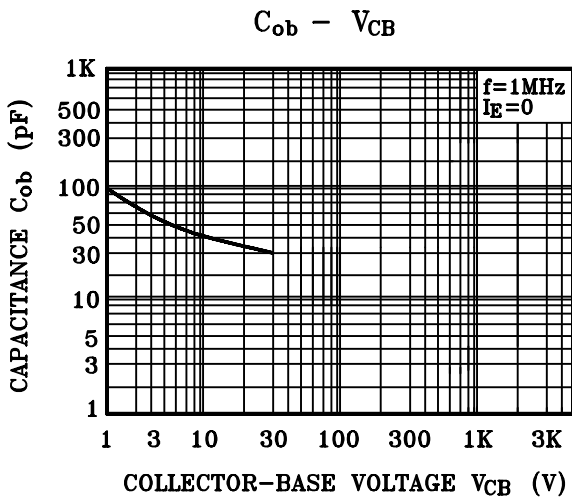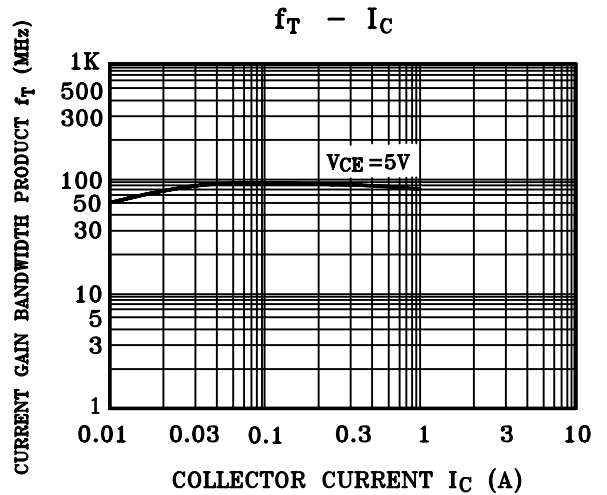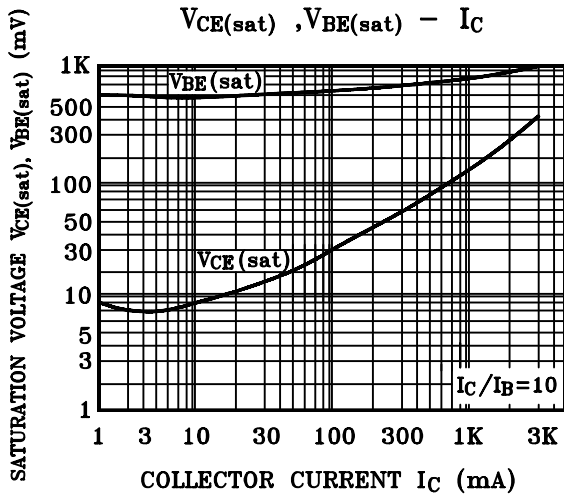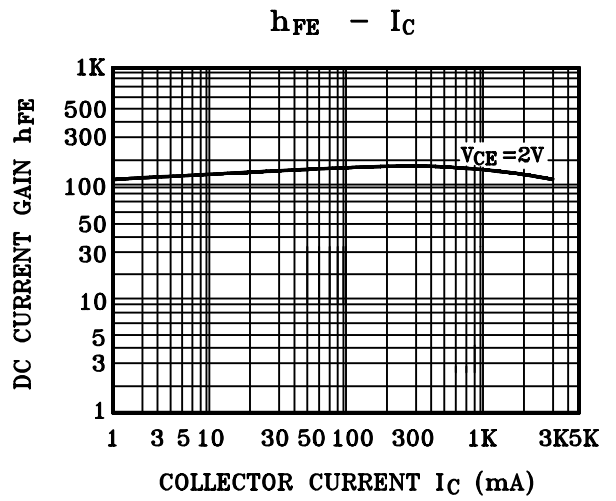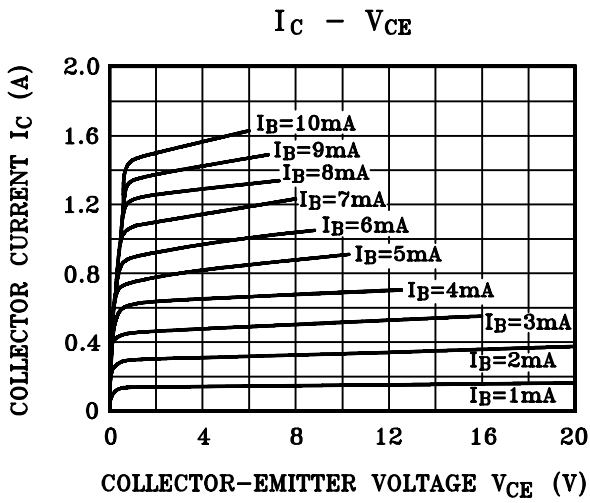

KTD882

dT - Ta

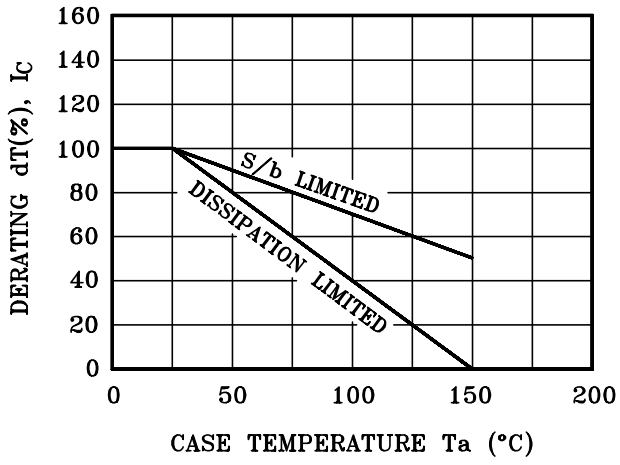

P_c - Ta

