
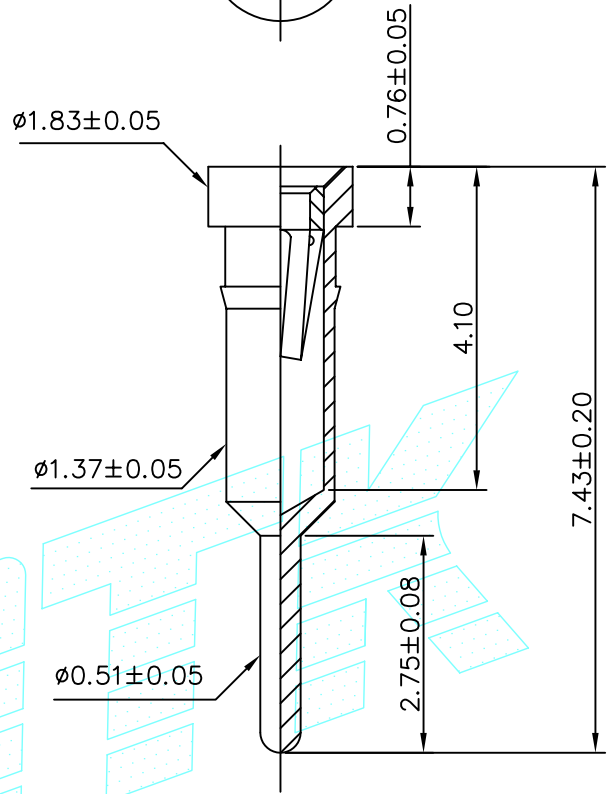



Clip Contact 6 Finger
P/N:CCT6 , P/N:CCG6

Clip Contact 4 Finger
P/N:CCT4 , P/N:CCG4

RoHS COMPLIANT

REV.	ECN NO.	DESCRIPTION	DATE
A		RELEASE	NOV. 12' 03
B		ADD. CC*6 & SPEC	JUL. 06' 06
C		ADD. RoHS	OCT. 03' 08
D		MODIFY P/N	SEP. 22' 11



Materials

Pin(outer sleeve):Brass,machined
Clip:Beryllium copper
Clips:6 or 4 contacts,gold plated

Electrical

Current rating:3 Amps/contact max.
Current resistance: < 4mΩ/contact

Mechanical

6 Finger :

Average insertion force with steel pin of Ø0.43mm ≤ 80g
Average withdrawal force with steel pin of Ø0.43mm ≥ 15g

4 Finger :

Average insertion force with steel pin of Ø0.43mm ≤ 250g
Average withdrawal force with steel pin of Ø0.43mm ≥ 25g

CC **

Clips:
4 or 6 Finger

Pin & Clip Plating:

G=Pin(outer sleeve):Gold plated &
Clip(contact finger):Gold plated
T=Pin(outer sleeve):Tin plated &
Clip(contact finger):Gold plated

TOLERANCE UNLESS OTHERWISE SPECIFIED

LINEAR	ANGLE
X. ±	X° ±
.X ±	.X° ±
.XX ± 0.10	.XX° ±
.XXX±	.XXX° ±
APPD	
CHKD	
DRAW	Z. SEP. 22' 2011

PROJECTION

UNITS	MM
SCALE	
SIZE	A4



GOLD-TEK ELECTRIC CO., LTD.

TITLE
PIN TERMINAL
4(6) CLIP CONTACT
CPART NO.

PART NO.	CC**
CAD NO.	I026
F:\Drw\MP\MP-0188	SHEET 1 OF 1

圖面編號:GTKSD1202-D(1)