



RoHS COMPLIANT

REV	ECN NO.	DESCRIPTION	DATE
A		RELEASE	JUN. 17'10
B		MODIFY P/N	JAN. 13'11

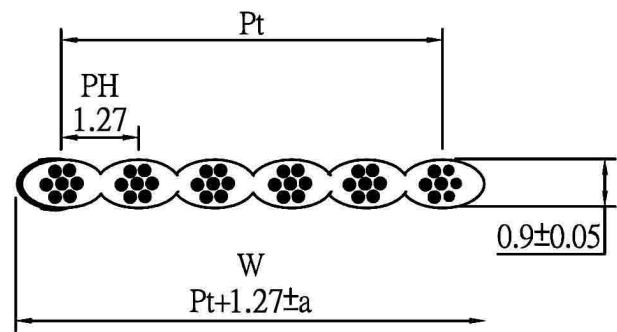

Marking/印字内容: LIAN YU AWM 2651 VW-1 105°C 300V 28AWG E128076 XX
 OR(LIAN YU "T" AWM 2651 VW-1 105°C 300V 28AWG E128076 XXXXX)

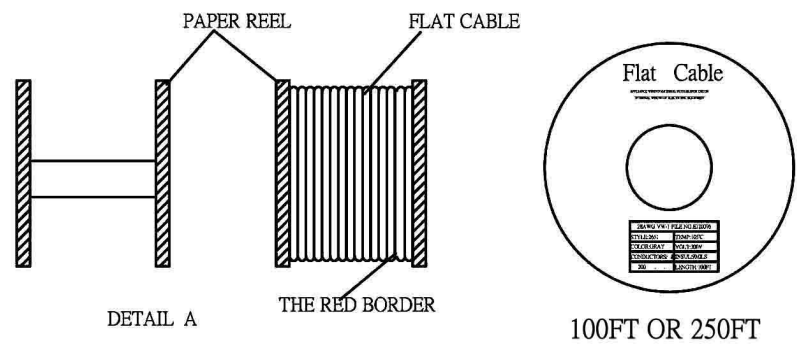

Number of Cores	Size of conductor		Thickness (mm±0.05)	Width(mm)	Allowable Error(mm)
	AWG	Composition(Stranded)±0.005mm			
8P	28	7/0.127	0.9	10.16	±0.30
9P	28	7/0.127	0.9	11.43	±0.30
10P	28	7/0.127	0.9	12.70	±0.30
12P	28	7/0.127	0.9	15.24	±0.30
14P	28	7/0.127	0.9	17.78	±0.30
15P	28	7/0.127	0.9	19.05	±0.30
16P	28	7/0.127	0.9	20.32	±0.30
20P	28	7/0.127	0.9	25.40	±0.30
25P	28	7/0.127	0.9	31.75	±0.30
26P	28	7/0.127	0.9	33.02	±0.30
30P	28	7/0.127	0.9	38.10	±0.30
34P	28	7/0.127	0.9	43.18	±0.40
40P	28	7/0.127	0.9	50.80	±0.40
50P	28	7/0.127	0.9	63.50	±0.40
60P	28	7/0.127	0.9	76.20	±0.40
64P	28	7/0.127	0.9	81.28	±0.40

外被材質/ Material: PVC
 顏色/Color: Gray

TOLERANCE UNLESS OTHERWISE SPECIFIED		PROJECTION	GOLD-TEK ELECTRIC CO., LTD.									
<table border="1"> <tr> <th>LINEAR</th> <th>ANGLE</th> </tr> <tr> <td>X. ±</td> <td>X° ±</td> </tr> <tr> <td>.XX ±</td> <td>.XX° ±</td> </tr> <tr> <td>.XXX ±</td> <td>.XXX° ±</td> </tr> </table>		LINEAR	ANGLE	X. ±	X° ±	.XX ±	.XX° ±	.XXX ±	.XXX° ±			
LINEAR	ANGLE											
X. ±	X° ±											
.XX ±	.XX° ±											
.XXX ±	.XXX° ±											
UNITS	MM	TITLE	PART NO. CAWG28**C1000									
SCALE	A4	Pitch:1.27mm UL2651	CAWG28**C2500									
APPD		28AWG Flat Cable	CAD NO. I393	SHEET								
CHKD		CPART NO.	F:\PDF\FC-A\FC-A0268	1 OF 1								
DRAW	Z	JAN. 13'2011	<div style="border: 2px solid blue; padding: 5px; display: inline-block;">圖面編號:GTKSD2815-B(1)</div>									