


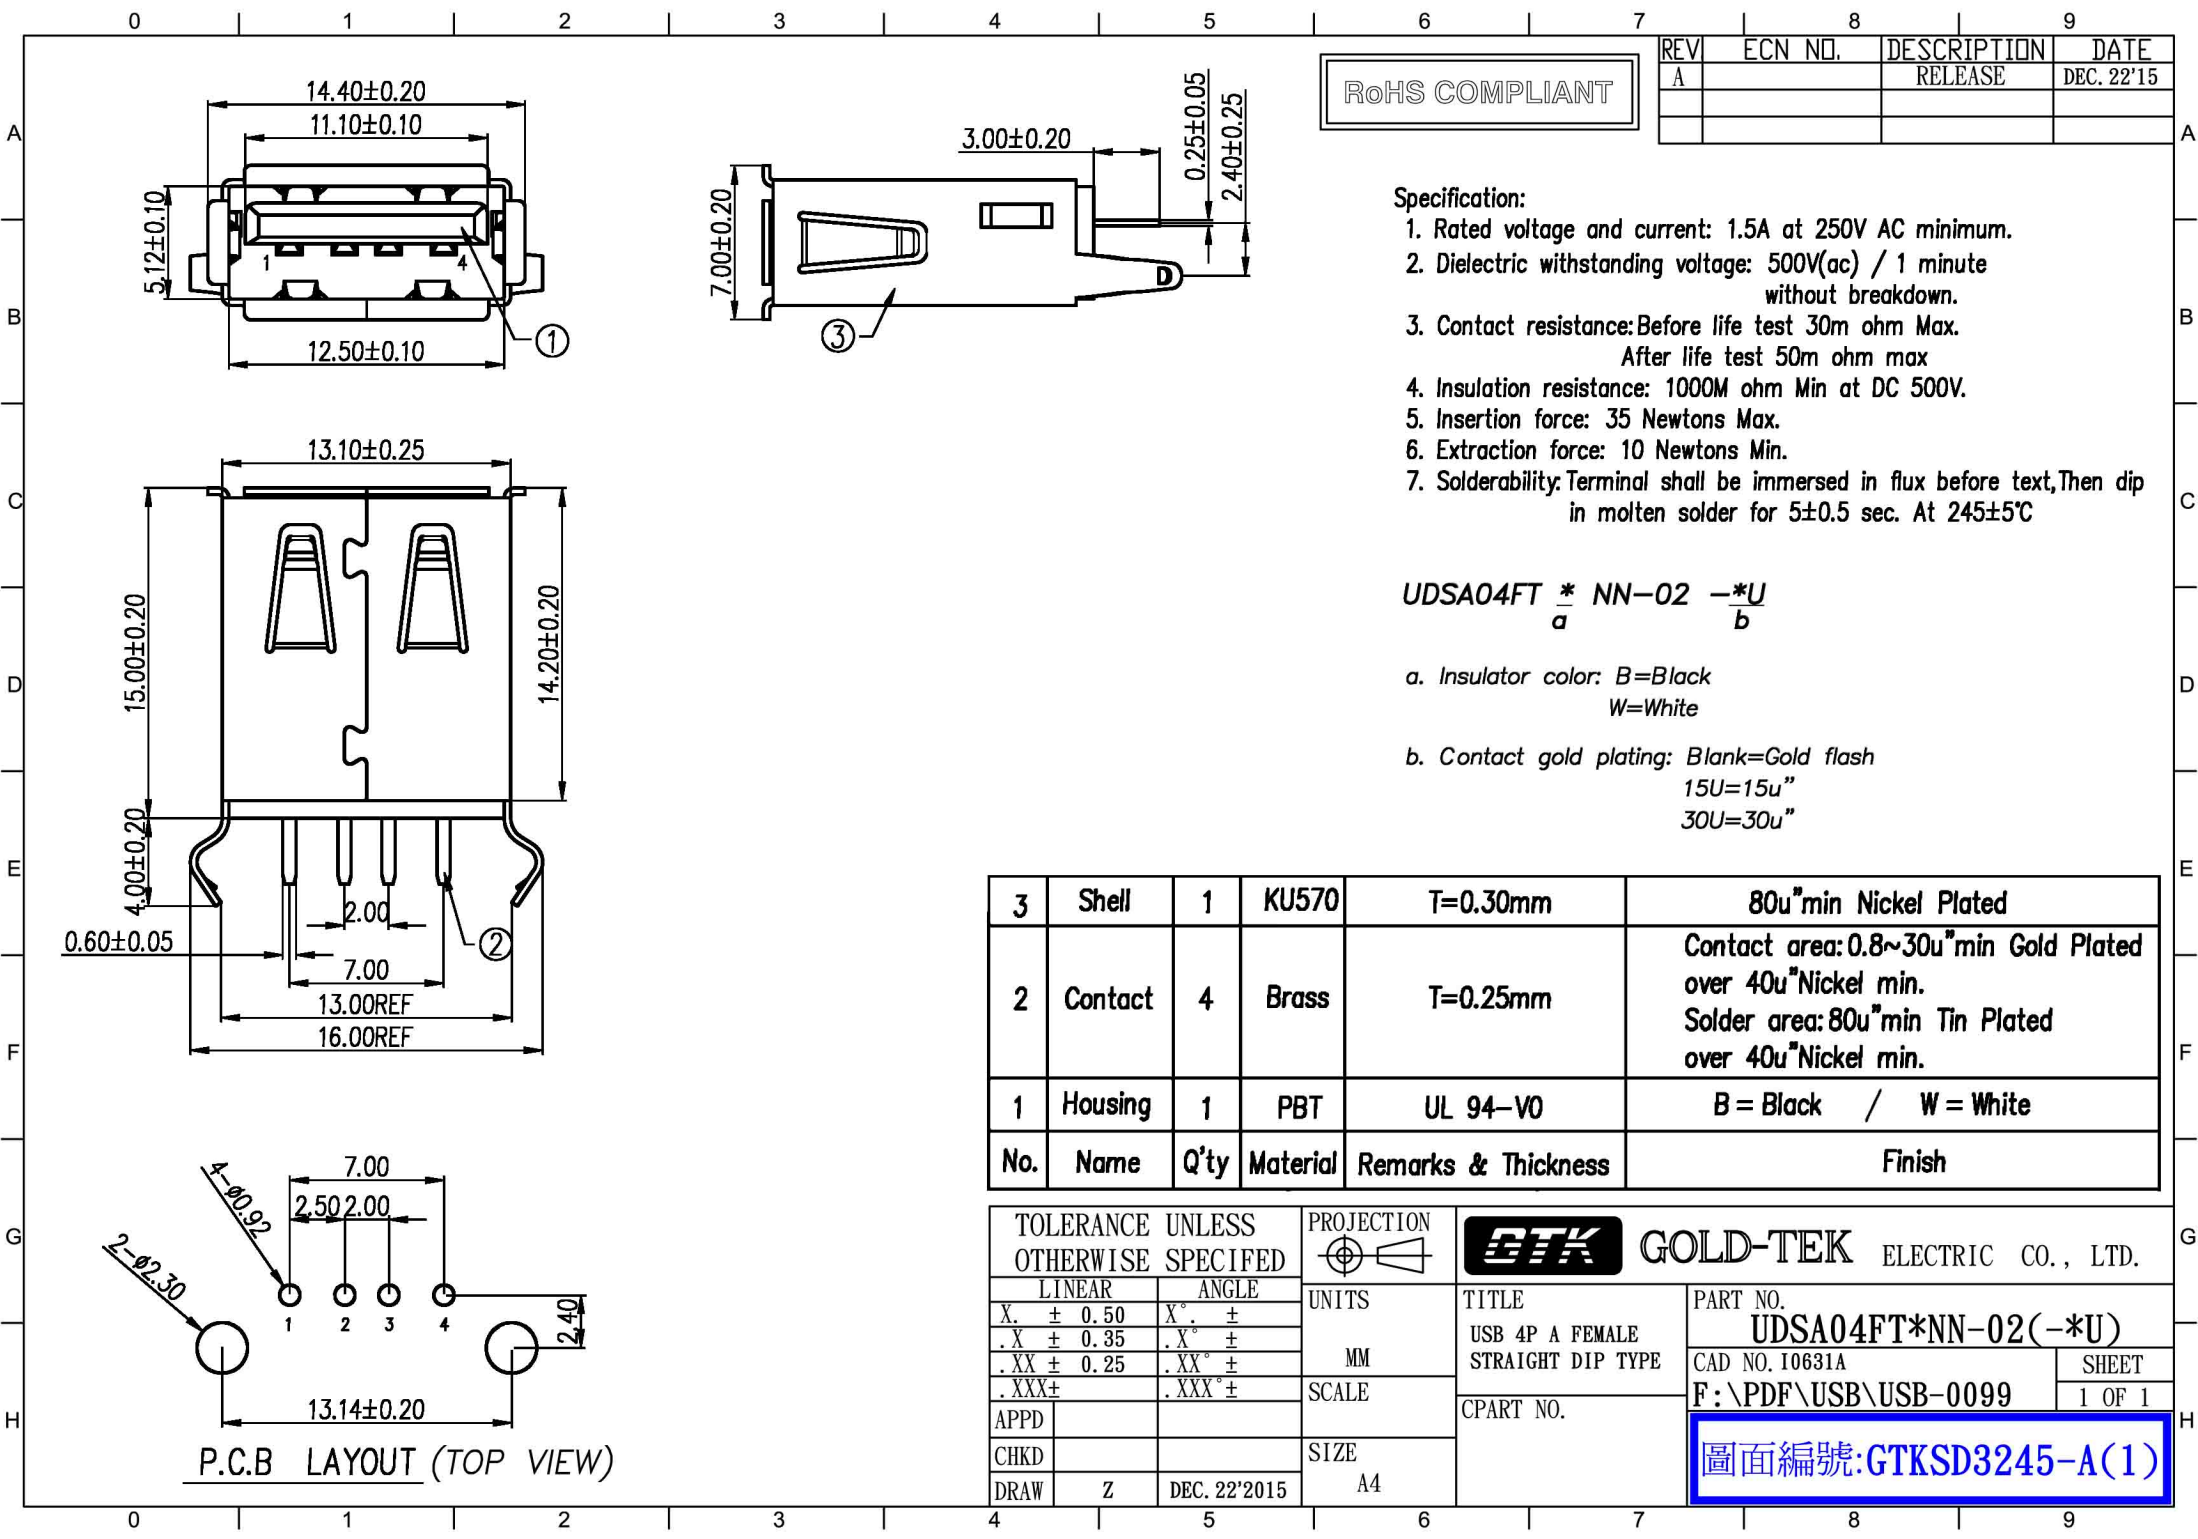

RoHS COMPLIANT

REV	ECN NO.	DESCRIPTION	DATE
A		RELEASE	DEC. 22'15

- Specification:
- Rated voltage and current: 1.5A at 250V AC minimum.
 - Dielectric withstanding voltage: 500V(ac) / 1 minute without breakdown.
 - Contact resistance: Before life test 30m ohm Max.
After life test 50m ohm max
 - Insulation resistance: 1000M ohm Min at DC 500V.
 - Insertion force: 35 Newtons Max.
 - Extraction force: 10 Newtons Min.
 - Solderability: Terminal shall be immersed in flux before text, Then dip in molten solder for 5±0.5 sec. At 245±5°C

UDSA04FT * NN-02 -*U
a b

- a. Insulator color: B=Black
W=White
- b. Contact gold plating: Blank=Gold flash
15U=15u"
30U=30u"

3	Shell	1	KU570	T=0.30mm	80u"min Nickel Plated
2	Contact	4	Brass	T=0.25mm	Contact area: 0.8~30u"min Gold Plated over 40u"Nickel min. Solder area: 80u"min Tin Plated over 40u"Nickel min.
1	Housing	1	PBT	UL 94-V0	B = Black / W = White
No.	Name	Q'ty	Material	Remarks & Thickness	Finish

TOLERANCE UNLESS OTHERWISE SPECIFIED		PROJECTION	GOLD-TEK ELECTRIC CO., LTD.		
LINEAR		ANGLE	TITLE USB 4P A FEMALE STRAIGHT DIP TYPE		
X. ± 0.50		X° ±			
.X ± 0.35		.X° ±			
.XX ± 0.25		.XX° ±			
.XXX ±		.XXX° ±	PART NO. UDSA04FT*NN-02(-*U) CAD NO. I0631A F:\PDF\USB\USB-0099 SHEET 1 OF 1		
APPD					
CHKD					
DRAW		Z			
		DEC. 22'2015	SIZE A4		

圖面編號:GTKSD3245-A(1)