


ITEM NO	Dimension(mm)						Cable size (mm*mm)
	F	L	W	DΦ	CΦ	A.W.G	
E0508	8.0	14.0	2.6	1.3	1.0	#22	0.5
E7508	8.0	14.4	2.8	1.5	1.2	#20	0.75
E1008	8.0	14.4	3.0	1.7	1.4	#18	1.0
E1508	8.0	14.4	3.5	2.0	1.7	#16	1.5
E2508	8.0	15.2	4.0	2.6	2.3	#14	2.5
E4009	9.0	16.5	4.4	2.6	2.8	#12	4.0
E6012	12.0	20.5	6.3	3.2	3.5	#10	6.0


Dimension in mm \pm 0.2mm

Application Method

- 1.Strip the wire
- 2.Insert wire into terminal
- 3.Crimp the terminal with wire pliers
- 4.Install on equipment

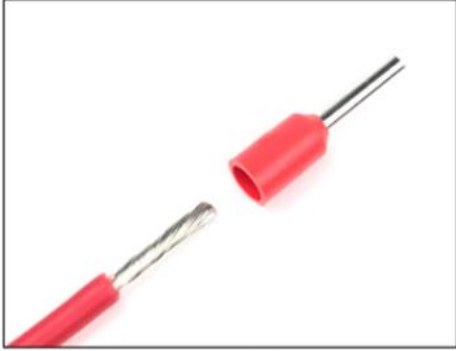


①

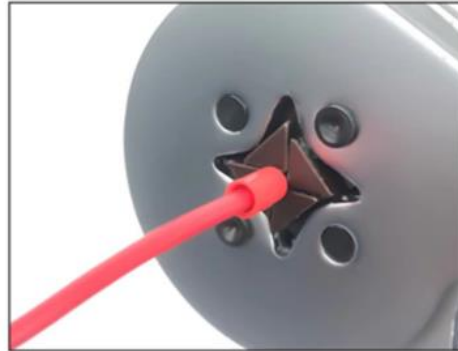

②



③

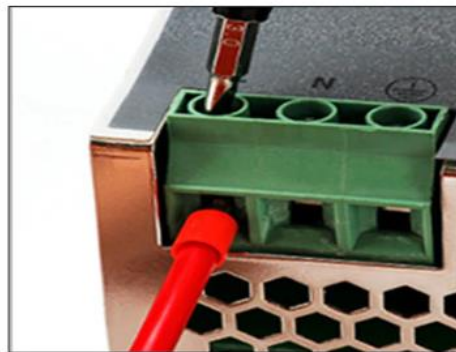

④