





RoHS COMPLIANT

REV	ECN NO.	DESCRIPTION	DATE
A		RELEASE	SEP. 01' 20

**Material:**  
**Contact Material: Phosphor Bronze**  
**Contact plating: Au Over 50μ" Ni**  
**Insulator Material: Black Polyester UL94V-0 PBT +30%G.F**

**Electrical:**  
**Current rating: 3.0Amps/contact max.**  
**Contact resistance: ≤20mΩ/contact**  
**Insulation resistance: ≥1000MΩ at V=100V**  
**Withstanding Voltage: 1000V AC/minute**

**Mechanical:**  
**Operating temperatures:**  
**Gold Plated: -55°C to +105°C**  
**Soldering temperature: +220°C max(PBT)**

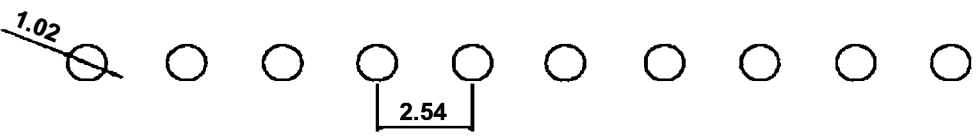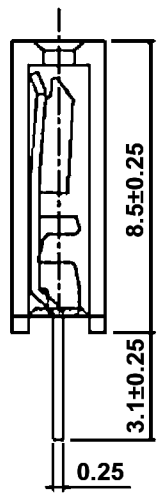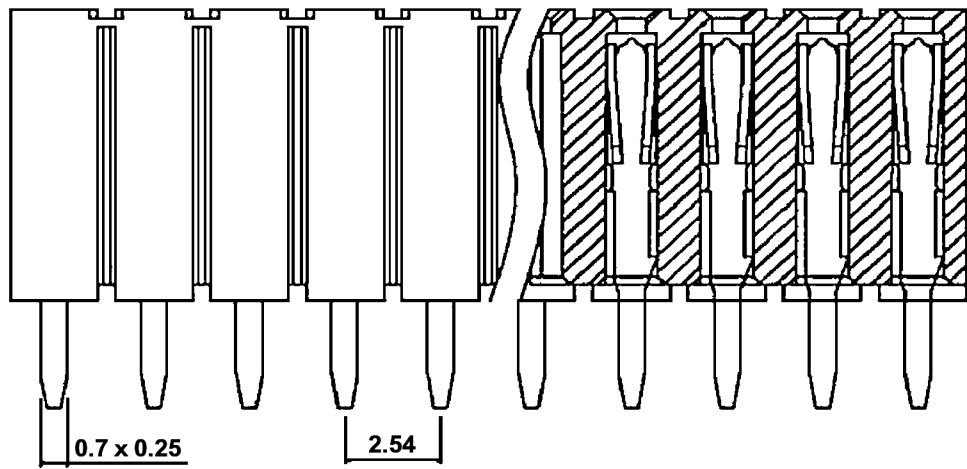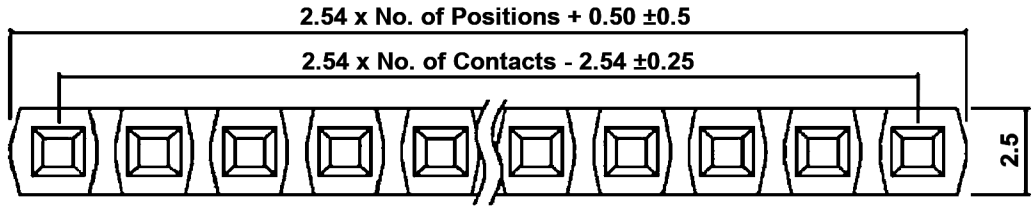

P.C.B LAYOUT

TOLERANCE UNLESS OTHERWISE SPECIFIED		PROJECTION	GOLD-TEK ELECTRIC CO., LTD.		
LINEAR		ANGLE	TITLE		
X. ± 0.50	X° ±		2.54mm Female Header		
.X ± 0.38	.X° ±		Single Row, Easy Break-off Type, Straight Dip		
.XX ± 0.25	.XX° ±		PART NO.	FHSS**G10-EB	
.XXX ±	.XXX° ±		CAD NO.	SHEET 1 OF 1	
APPD		SCALE	F:\PDF\SOC\SOC-1156		
CHKD		SIZE	CPART NO.		
DRAW	Z	SEP. 01' 2020	圖面編號:GTKGS2723-A(1)		